

Review on Current Research Trends in Wire Electrical Discharge Machining (WEDM)

^{*1}Danial Ghodsiyeh, ²Abolfazl Golshan, ³Jamal Azimi Shirvanehdeh

¹Faculty of Mechanical Engineering Universiti Teknologi, Malaysia 81310 Skudai, Johor, Malaysia,

^{2,3}Department of Mechanical Engineering, Universiti Putra Malaysia, Serdang, Selangor, Malaysia-43300.

^{*1}Danial.ghodsiyeh@gmail.com, ²gabolfazl@gmail.com, ³arshamazimi@yahoo.com

Abstract

Wire-electro discharge machining (WEDM) has become an important non-traditional machining process, as it provides an effective solution for producing components made of difficult-to-machine materials like titanium, zirconium, etc., and intricate shapes, which are not possible by conventional machining methods. Due to large number of process parameters and responses lots of researchers have attempted to model this process. This paper reviews the research trends in WEDM on relation between different process parameters, include pulse on time, pulse off time, servo voltage, peak current, dielectric flow rate, wire speed, wire tension on different process responses include material removal rate (MRR), surface roughness (Ra), sparking gap (Kerf width), wire lag (LAG) and wire wear ratio (WWR) and surface integrity factors. Furthermore, different types of WEDM methods introduced and discussed. In addition the paper highlights different modelling and optimization methods and discussed their advantage and disadvantage. The final part of the paper includes some recommendations about the trends for future WEDM researches.

Keywords: Wire electrical discharge machining (WEDM), Process optimisation; Material removal rate; Surface finish; Wire types

1. Introduction:

Wire EDM (Electric Discharge Machining) is a thermo-electrical process which material is eroded by a series of sparks between the work piece and the wire electrode (tool). The part and wire are immersed in a dielectric (electrically nonconducting) fluid which also acts as a coolant and flushes away debris (Kuriakose and Shunmugam, 2004). The movement of wire is controlled numerically to achieve the desired three-dimensional shape and high accuracy of the work piece (Mahapatra and Amar Patnaik, 2006a). Wire EDM, is not the new kid of machining. It was introduced in the late 1960s', and has revolutionized the tool and die, mold, and metalworking industries. It is probably the most exciting and diversified machine tool developed for this industry in the last fifty years, and has numerous advantages to offer. In this process, there is no contact between work piece and electrode, thus materials of any hardness can be cut as long as they can conduct electricity (Kuriakose and Shunmugam, 2004). Whereas the wire does not touch the workpiece, so there is no physical pressure imparted on the workpiece and amount of clamping pressure required to hold the workpiece is minimal. Although electrical conductivity is an important factor in this type of machining, some techniques can be use to increase the efficiency in machining of low electrical conductive materials (Kozak et al. (2004)). The Spark Theory on a wire EDM is

basically the same as that of the vertical EDM process. Many sparks can be observed at one time. This is because actual discharges can occur more than one hundred thousand times per second. The heat of each electrical spark, estimated at around 15,000° to 21,000° Fahrenheit. This process has been widely used in aerospace, nuclear and automotive industries, to machine precise, complex and irregular shapes in various difficult-to-machine electrically conductive materials (Jain, V.K.,(2005), CunShan X.,(2012), Benedict, G.F.(1987)). Recently, WEDM process is also being used to machine a wide variety of miniature and micro-parts in metals, alloys, sintered materials, cemented carbides, ceramics and silicon (Mukherjee, R., et al.(2012)). These characteristics makes WEDM a process which has remained as a competitive and economical machining option fulfilling the demanding machining requirements imposed by the short product development cycles and the growing cost pressures (Ho, K.H. et al.(2004), Jameson, E.C.(2001)).

2. Discussion


2.1 Wire EDM Parameters:

2.1.1 Pulse on time and Pulse off time

Electric discharge machining must occur (ON time) and stop (OFF time) alternately during machining. During the ON time, the voltage is applied to the gap between the workpiece and the electrode (wire), while no voltage is

placed during the OFF time. Consequently, electric discharge occurs only for the duration of the ON time. To have a long duration of electric discharge, it may be possible to select the great value for the ON time; however, it may cause a short circuit to occur, resulting in wire breakage. To avoid such trouble, the OFF time must be inserted as it shown in figure 1.

Fig.1. Pulse on time and off time

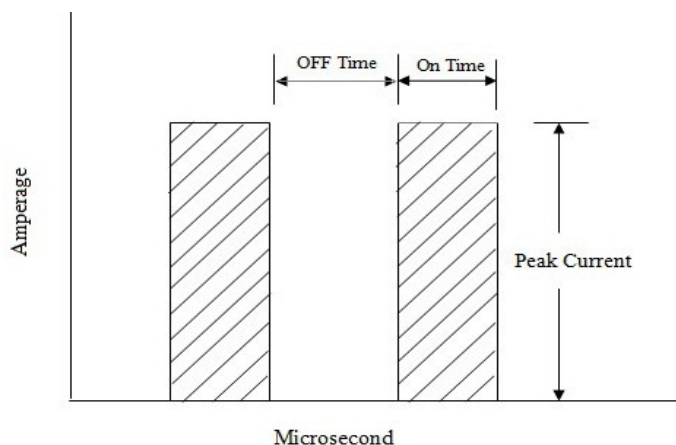

2.1.2 Peak current and gap voltage

The peak current is basically a most important machining parameter in WEDM. It is the amount of power used in WEDM and measures in unit of amperage. During each pulse on-time, the current increases until it reaches a preset level, which is expressed as the peak current. In both die sinking and wire-EDM processes, the maximum amount of amperage is governed by the surface area of the cut. Higher amperage is used in roughing operations and in cavities or details with large surface areas.

Gap voltage or open circuit voltage specifies the supply voltage to be placed on the gap. The greater this value is, the greater the electric discharge energy becomes. However; normally these factors are not independent. In the other words as the gap voltage increase the peak current also automatically increases. In some WEDM machines both of these factors show machining voltage.

2.1.3 Servo voltage and Servo feed rate

Parameter servo voltage (SV) is used for controlling advances and retracts of the wire. During machining, the mean machining voltage varies depending on the state of the machining between the workpiece and the electrode. SV established the reference voltage for controlling advances and retracts of the wire. If the mean machining voltage is higher than the set voltage


level, the wire advances, and if it is lower, the wire retracts (to be precise, the work table advances or retracts instead of wire).

Therefore, a higher the value for SV, the wider the gap between the work piece and the electrode becomes. Higher values for SV also decrease the number of electric sparks, stabilizing electric discharge, although the machining rate is slowed down. When a smaller value is set for SV, the mean gap becomes narrower, which leads to an increase in number of electric sparks. It can speed up the machining rate; however, the state of machining at the gap may become unstable, resulting in wire breakage.

Also servo feed rate (SF) specifies the feed rate of the table during machining. Normally the WEDM machines select this factor automatically with respect to the SV, but this factor also can set manually. In this case machining table has constant speed without regard to the SV.

So both servo voltage and servo feed rate can affect the feed rate as it show in figure2.

Fig.2. Feed rate and gap size (Roger Kern, 2008)

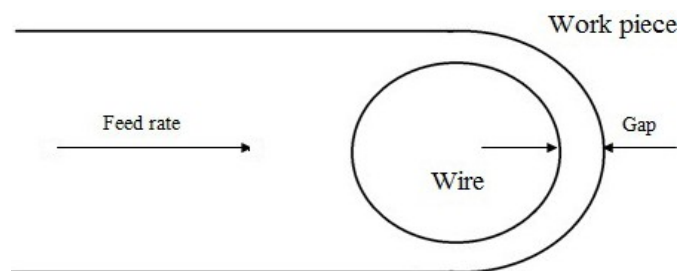

2.1.4 Dielectric flow rate

Electro discharge can occur in the air; however, it is not stable and can't be used for rough cut machining. To obtain stable electric discharge, dielectric fluid is required. Within the dielectric fluid, electric discharge machining can be stabilized with efficient cooling and chip removal. The de-ionized water is typically used as a dielectric in wire EDM because it's environmental friendly characteristic. For example due to low thermal conductivity in Titanium alloy material high flushing pressure is absolutely necessary for rough machining, otherwise the short circuit phenomenon will cause to wire breakage. Figure3 show the cutting line while machining Titanium alloy (Ti6Al4V) in normal flushing pressure. This figure shows in absence of high flashing pressure cutting line cannot continue more that 1mm.

Fig.3. Wire broken and small cutting line in Titanium machining due to low flushing pressure




2.1.5 Wire speed or wire feed

Wire speed is another important parameter in WEDM that show the speed of wire in WEDM. As the wire speed increase the wire consumption and in result the cost of machining will increase while low wire speed can cause to wire breakage in high cutting speed.

2.1.6 Wire tension

Wire tension is the factor that can control the tension of wire in WEDM. If the wire tension is high enough the wire stays straight otherwise wire drags behind as it shown in figure 4.

Fig.4. Relathion between wire drag and wire tension.

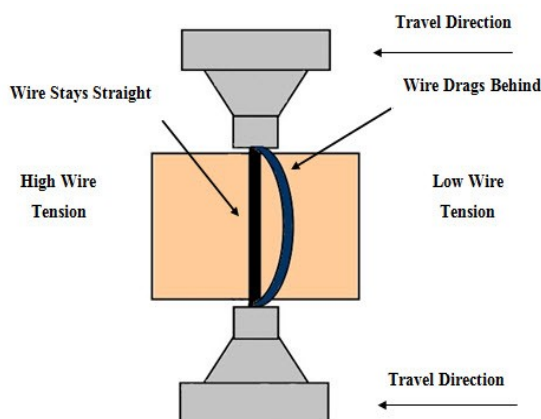

2.2 Wire Type

When wire EDM was first introduced, the main problem was wire material because this material should have lots of properties. The key physical properties of EDM wires include, *Conductivity*. A high conductivity rating is important because, at least theoretically, it means the wire can carry more current, which equates to a 'hotter' spark and increased cutting speed.

Tensile Strength, which indicates the ability of the wire to withstand the wire tension, imposed upon the wire during cutting, in order to make a vertically straight cut.

Elongation, which describes how much the wire "gives" or plastically deforms just before it breaks. *Melting Point*, we would prefer that our wire

electrode be somewhat resistant to being melted too quickly by electric sparks. *Straightness*: That can help wire to stay straight. *Flush ability*, the better the flushability, the faster the wire will cut and the chance of wire breakage will decrease. *Cleanliness*, Wire can be "dirty", due to contamination by residual metal powder left over from the drawing process, drawing lubricant, or paraffin added to the wire by some manufacturers prior to spooling. (Roger Kern, 2007).

2.2.1 Different wire materials

2.2.2 Copper

Was the original material first used in wire EDM. Although its conductivity rating is excellent, its low tensile strength, high melting point and low vapor pressure rating severely limited its potential. Today its practical use is confined to earlier machines with power supplies designed for copper wire.

2.2.3 Brass

Was the first logical alternative to copper when early EDM'ers was looking for better performance? Brass EDM wire is a combination of copper and zinc, typically alloyed in the range of 63–65% Cu and 35–37% Zn. The addition of zinc provides significantly higher tensile strength, a lower melting point and higher vapor pressure rating, which more than offsets the relative losses in conductivity. Brass quickly became the most widely used electrode material for general-purpose wire EDM. It is now commercially available in a wide range of tensile strengths and hardness.

2.2.4 Coated Wires

Since brass wires cannot be efficiently fabricated with any higher concentration of zinc, the logical next step was the development of coated wires, sometimes called plated or "stratified" wire. They typically have a core of brass or copper, for conductivity and tensile strength, and are electroplated with a coating of pure or diffused zinc for enhanced spark formation and flush characteristics. Originally called "speed wire" due to their ability to cut at significantly higher metal removal rates, coated wires are now available in a wide variety of core materials, coating materials, coating depths and tensile strengths, to suit various applications and machine requirements. Although more expensive than brass, coated wires currently represent the optimum choice for top all-around performance. Antar, M.T., *et al.* (2011) presented the work piece productivity and integrity when WED Ming nickel based super alloy and titanium alloy, and it was found that an increase in productivity of about 40% for nickel based

super-alloy and about 70% for titanium alloy was possible when replacing standard uncoated brass wire with using Cu core coated wires diffusion annealed under the same operating parameters. In terms of recast layer thickness, better results were achieved using the coated wire for both roughing and trim operation. Actually with machining with coated wire about 25% thinner recast for nickel based super alloy and about 40% thinner for titanium alloy have produced.

In another research Poro's and Zaborski, (2009) found that increase of discharge time can affect cutting speed and material removal rate significantly by 62% for brass wire electrode and 138% for zinc coated brass wire. Therefore According to different research the cutting speed of the zinc-coated wire is almost twice of the brass wire because the exterior zinc coating of the electrode has a lower melting temperature than the core material (brass). Hence, the zinc is overheated and evaporated in the presence of a pulse. The evaporation acts as a heat sink, which means reducing the wire temperature and improving the effectiveness of the WEDM process. Consequently, the cutting speed increases by up to 50% as more intense thermal flows are enabled (Prohaszka *et al.*, 1997). In addition, the coating evaporation increases the gap size and results in better debris removal, which can reduce the surface roughness and the sparking gap (Dauw and Albert, 1992). However, the higher cutting speed of the zinc-coated wire also deteriorates the sparking gap and surface roughness. Composite wires are an advance over zinc-coated as the wire of choice for work pieces. The Composite wires have a plain carbon steel core that is surrounded by a layer of pure copper and coated on the outside with zinc-enriched brass. However for tall work pieces copper clad steel wires have better performance. (Kapoor, J., *et al.*, 2010). In addition Kruth, J.P., *et al.* (2004) found that composite wires with high tensile core can increase accuracy significantly specially in corner cutting. In terms of resistance to breakage diffusion annealed wires have significant improvement over plain wires.

2.2.5 Fine Wires

Normally the wire diameters are in the range of 0.006–0.012 inches. High precision work on wire EDM machines, requiring small inside radii, and calls for wire diameters is in the range of 0.001–0.004 inches. Since brass and coated wires are not practical, due to their low load carrying capacity in these sizes, molybdenum and tungsten wires are used. However, due to limited conductivity, high melting points and low vapor pressure

ratings, they are not suitable for very thick work and tend to cut slowly. Until now, only a few scientific works have been dealing with cutting by W-EDM using wires with a diameter below 50µm. The materials of the wires are tungsten with high tensile strength and melting temperature and brass-coated steel wire. Typical ultra thin wire diameters are 20, 25, 30 and 50µm. These wires can be used to produce micro-parts with wire-EDM. (Klocke, F. *et al.* (2004)).

2.3 Different process responses

2.3.1 Material removal rate and cutting speed:

Lots of research tried to maximize the material removal rate and cutting speed by different approaches. Because these factors can help to increase, economic benefits in WEDM considerably. Almost both of these factors (material removal rate and cutting speed) determine same phenomena which is the machining rate.

MRR value normally obtained by the following equation:

$$MRR = (W_b - W_a) / (T_m \times p) \text{ (mm}^3/\text{sec)} \quad (1)$$

Rajurkar and Wang (1993) analyzed the wire rupture phenomena with a thermal model and experimental investigations. It was found that the material removal rate in WEDM increases initially with the decrease of pulse off time. However, at a very short pulse off time, the gap becomes unstable which leads to a reduction in the machining rate. Singh and Garg (2009) presented the effects of process parameters on material removal rate in WEDM, and it was found that, when pulse on time and peak current increase material removal rate also increase but with the increase of pulse off time and servo voltage, MRR decrease. These results are in agreement with those reported by Po-Huai Yu, *et al.* (2011). Poro's and Zaborski. (2009) investigate the effects of wire and work piece material on WEDM efficiency, it was found that higher value of thermal conduction, and specific heat capacity of machined material will cause the decrease of efficiency of WEDM. Furthermore, they found that thermal conductivity and specific heat proved to be most significant factors in work piece which can determine MRR and volume of heat affected zone. In another work (Mahapatra S. S. and Amar Patnaik, 2006a), an attempt was made to determine the important machining parameters for performance measures like MRR, surface finish and kerf width in the WEDM process. Factors like discharge current, pulse duration, and dielectric flow rate and their interactions have been found to play a significant role in rough cutting operations for maximization of MRR. Shah, A., *et al.* (2011),

investigated the effect of work piece thickness on the material removal rate, it was expected that this factor was a significant one while according to this research work piece thickness is not a significant factor for material removal rate. Konda *et al.* (1999) classified the various potential factors affecting the WEDM performance measures into five major categories namely the different properties of the work piece material and after machining (g), respectively. T is machining time (sec) and dielectric fluid, machine characteristics, adjustable machine and p is the density of work piece material. The cutting speed also computes by dividing the cutting length by the corresponding cutting time. Based on the theory increasing the peak current can increase the energy of each discharge, producing wider and deeper craters that cause to higher material removal rate. Also increasing pulse on time can increase the duration of each discharge that can increase material removal rate. Lots of researches confirm these theories such as, Tosun, N. *et al.* (2004) presented an investigation on the optimization and the effect of machining parameters on the kerf and the MRR. In this work, the level of importance of the machining parameters on the MRR was determined by using ANOVA. It was found that open circuit voltage and pulse duration were the highly effective parameters whereas wire speed and dielectric flushing pressure were less effective factors. According to this research open circuit voltage for controlling the MRR was about six times more important than the second ranking factor (pulse duration). Machining parameters, and component geometry. In addition, they applied the design of experiments (DOE) technique to study and optimize the possible effects of variables during process design and development, and validated the experimental results using noise-to-signal (S/N) ratio analysis. There are other important studies that work on material removal rate, such as (Kozak, J. *et al.* (1994), Spedding, T.A. and Wang, Z.Q. (1997a), Kuang-Yuan Kung & Ko-Ta Chiang (2008), Parashar, V., *et al.* (2012))

2.3.2 Surface Roughness:

Lots of research tried to minimize the surface roughness by different approaches. Based on the theory surface roughness significantly affected by the pulse on time and peak current and the cutting speed and surface roughness have an inverse relationship. Based on Sarkar *et al.* (2008) investigation surface roughness decrease as the cutting speed increase. According to different research pulse on time is the most significant factor that affects surface roughness. As the pulse on time

increases, the surface roughness increases because of “double sparking”. In the other words double sparking and localized sparking become more frequent as the pulse on time increases. Double sparking produces a poor surface finish. These results are in agreement with those reported by Sarkar *et al.* (2005); Kanlayasiri and Boonmung (2007a and b) and Kumar *et al.* (2012). Sarkar (2005) confirm that pulse on time is the most important parameters that influence on surface roughness followed by peak current for zinc coated wire. Kanlayasiri and Boonmung (2007a and b) found that pulse on time and peak current have significant effect on surface roughness and as these variable increase the surface roughness become larger. Kumar *et al.* (2012) also confirm that larger pulse on time and peak current will cause to double sparking which increase surface roughness value. Tosun, *et al.* (2003) investigated the effects of the cutting parameters on size of erosion craters (diameter and depth) on wire electrode. An investigation of wire electrode craters is crucial for the understanding of wire rupture, kerf size, and surface roughness of the workpiece. Larger sizes of craters on the wire increase the risk of wire rupture and also result in poor workpiece surface quality and machining accuracy. It is found that increasing the pulse duration, open circuit voltage, and wire speed increases the crater size, whereas increasing the dielectric flushing pressure decreases the crater size. Rao, P., S. *et al.* (2011) had stated their effort to optimize surface roughness and it was found that, the parameters like peak current and pulse on time are most significant. Wire tension and servo voltage are significant and pulse off time; flushing pressure and wire speed are less significant factors that affect surface roughness.

This result is in the agreement with Vamsi *et al.* (2010) and Kumar, *et al.*, (2012) investigation. Haşçalık, A. and Çaydas, U., (2004) investigate the effects of different parameters on surface roughness. It was revealed that the surface roughness increased when the pulse duration and open circuit voltage were increased. It appears that the surface roughness primarily depends on these parameters, dielectric fluid pressure and wire speed not seeming to have much of influence.

Mahapatra and Patnaik (2006b) studied the effects of six factors include, discharge current, pulse duration, pulse frequency, wire speed, wire tension and dielectric flow rate on surface roughness and material removal rate and it was found that factors like discharge current, pulse duration, dielectric flow rate and their interactions play significant role in surface roughness and material removal

rate. Tosun et al. (2004) investigated the effect of the pulse duration, open circuit voltage, wire speed and dielectric flushing pressure on the WEDMed work piece surface roughness. It was found that the increasing pulse duration, open circuit voltage and wire speed increases with the surface roughness, whereas the increasing dielectric fluid pressure decreases the surface roughness.

There are other important studies that work on surface roughness, such as (Spedding, T.A. and Wang, Z.Q.(1997b), Liao Y.S. et al. (2004), Yan, M.T. and Lai, Y. P. (2007), Han, F., et al. (2007a and b) Bamberg, E. and Rakwal, D.,(2008), Choi, K. et al. (2008), Aspinwall, D.K. et al. (2008), Nishikawa, M. and Kunieda, M.(2009))


2.3.3 Kerf width and Sparking Gap

Kerf width and sparking gap investigate the same phenomena as it shown in figure 5, and it is the measure of the amount of the material that is wasted during machining. It can determine the dimensional accuracy of the finishing part and the internal corner radius of the product in WEDM operations are also limited by this factor (Parashar et.al, 2010).

Following equation normally use to determine the Sparking gap value:

$$\text{Sparkling gap (mm)} = (\text{average of kerf width-diameter of wire})/2 \quad (2)$$

Fig.5. Details of Sparking Gap
(Scott, 1991)

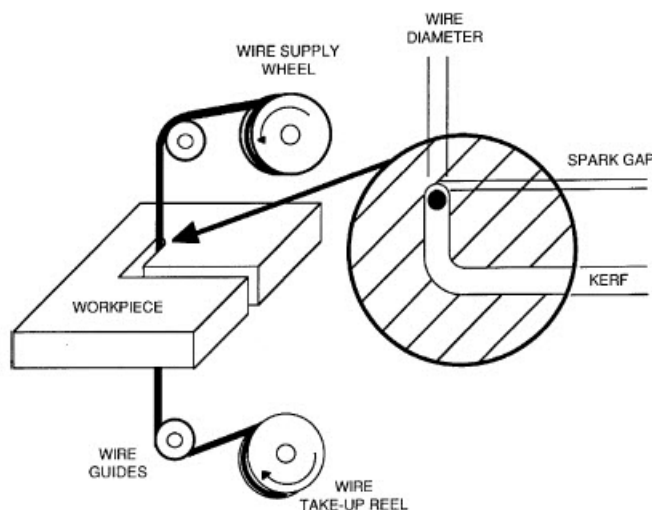

There are some conflict reports about pulse off time duration, peak current and dielectric flushing pressure for their influence on kerf width.

Parashar et.al (2010) investigate the effects of WEDM parameters on kerf width while machining Stainless steel, it was found that pulse on time and

dielectric flushing pressure are the most significant factors, while gap voltage, pulse off time and wire feed are the less significant factor on the kerf width. Tosun, N. et al. (2004) presented an investigation on the level of importance of the machining parameters on the kerf width by using ANOVA. It was found that open circuit voltage and pulse duration were the highly effective parameters whereas wire speed and dielectric flushing pressure were less effective factors. According to this research open circuit voltage for controlling the kerf width was about three times more important than the second ranking factor (pulse duration). Swain, A.K., et al. (2012) also studied the kerf width and it was found that just gap voltage is the significant factor that affect kerf width and pulse on time and pulse off time are insignificant.

2.3.4 Wire Wear Ratio

Some researches tried to minimize the wire wear ratio by different approaches. Because this factor can help to decrease the wire rupture phenomena considerably.

Wire wear ratio (WWR) value normally obtained by the following equation:

$$\text{WWR} = \text{WWL}/\text{IWW} \quad (3)$$

Where WWL is the weight loss of wire after machining and IWW is the initial wire weight. Tosun and Cogun, C., (2003) investigated the effects of different wire EDM parameters on wire wear ratio and it was found experimentally that the increasing pulse duration and open circuit voltage increase the WWR whereas the increasing wire speed and dielectric fluid pressure decrease it. In addition it was found that the high WWR is all. In case of orthogonal corners, the solution to this problem is pretty simple and straight forward which is over travel method however things get complicated when cutting is desired along a curve. (Sinha, S. K., (2010))

Puri, A.B. and Bhattacharyya, B. (2003) investigated the effect of different WEDM parameters on wire lag during rough cut and trim cut process. It was found that pulse on time, pulse off time and pulse peak current during rough cutting; and pulse peak voltage, wire tension, servo spark gap set voltage, during trim cutting are the significant factors. There are other important studies that work on WEDM inaccuracy, such as (Hsue, W. J. (1999), Yan, M. T., and Huang, P. H. (2004), Han, F., et al. (2007) and Zhang, X. Y. et al. (2012))

2.3.6 Surface Integrity

To improve the surface integrity of the WEDM process, factors like the surface roughness, white layer thickness, and surface crack should be considered. High-quality surface roughness can ways accompanied by


high MRR and high R value. These repentance the fatigue strength, corrosion and wear resistance of the results are in agree with the other research like Ramakrishnan, R., and Karunamoorthy, L. (2006)

2.3.5 Wire lag and Wire EDM inaccuracy

WEDM is very useful wherever complex geometry with tight tolerances needs to be generated. In this condition geometrical inaccuracies are completely unacceptable. Some researches tried to minimize the wire lag because geometrical inaccuracy can caused due to this phenomenon however still there is lack of information about this fact. More research about wire lag can help for improvement of accuracy in contour cutting with wire EDM.

The wire lag phenomena is illustrate in figure 6.

Fig.6. Wire lag phenomena

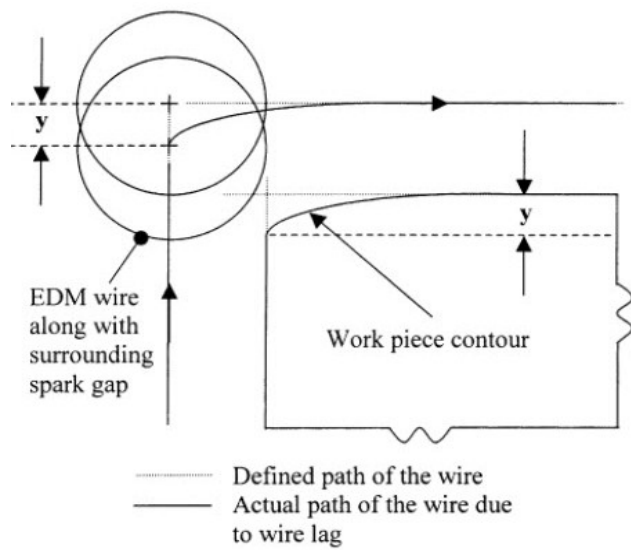

The wires lag normally measure using Profile Projector by measuring the projection image. work piece (Lopez *et al.*, 2012).

Kuriakose and Shunmugam, (2004) investigated the effects of different parameters on surface characteristics of Ti6Al4V. It is observed that more uniform surface characteristics are obtained with coated wire electrode. Furthermore it was found that pulse off time is the most sensitive parameter that influences the formation of layer consisting of mixture of oxides. With a lower value of pulse of time, a considerable reduction in the formation of oxides can be obtained.

In addition it was reveal that the parameters such as pulse off time, pulse on time, dielectric flushing pressures, wire speed and wire tension are identified as important process parameters of WEDM process, from

metallurgical point of view.

Newton, T. R., *et al.* have studied the effect of process parameters on the formation and characteristics of recast layer and in term of recast layer it was found that the peak discharge current and pulse on time to be the driving factors in determining average recast layer thickness and pulse off time and wire diameter did not display a significant effect on average recast layer thickness.

In Puri, A.B. and Bhattacharyya, B. (2005) paper, an attempt has been made to model the white layer depth through response surface methodology (RSM) in a WEDM process comprising a rough cut followed by a trim cut. It was found that the white layer depth increases with increasing pulse on time during the first cut and it decreases with increasing pulse on time during trim cutting. In addition with increasing cutting speed in trim cutting, the white layer depth first reduces and then starts increasing. Hassan, M. A *et al.* (2009) studied of the surface integrity of AISI 4140 steel in wire electrical discharge machining and it can be concluded that the pulse-on duration has major influence in defining the WEDM surface texture as compared to the peak current.

2.4 Dry and Near-Dry Wire Cut

There is a method in wire EDM which is conducted in a gas atmosphere without using dielectric liquid, this method called dry-WEDM. Recently, new method have introduced in WEDM which called Near-Dry Wire-Cut. In this method the liquid dielectric fluid is replaced by the minimum quantity of liquid with the gas mixture. (Boopathi, S. (2012))

Kunieda and Furudate (2001) conducted studies in dry WEDM. It was found that in dry-WEDM, the vibration of the wire electrode is minimal due to the negligibly small process reaction force. In addition narrower gap distance and no corrosion for work piece during machining are the other advantages of dry EDM. These characteristics can improve the accuracy and surface quality of workpiece during of finish cutting. The main drawbacks are lower material removal rate compared to conventional WEDM and streaks are more likely to be generated in this method. The drawbacks can be resolved by increasing the wire winding speed and decreasing the actual depth of cut. These results are in agreement with other reports. For example Wang, T. *et al.* (2006 and 2008) Studied finishing cut with Dry-WEDM and it was found that dry-WEDM have some advantage like better straightness, lower surface roughness and shorter gap length and the main disadvantage of this method was

poorer material removal rate in compare with conventional method. In conflict with this study Abdulkareem, S., (2011) investigated the effects of machining parameters on surface roughness in dry and wet wire- electrical discharge machining, It was found that wet WEDM gives better surface roughness compared to dry WEDM, it is to be noted that in this study normal machining have studied(not finishing process).

Furthermore, Wang, T. (2006) studied High-speed WEDM (HS-WEDM) in Gas and emulsion liquid and experimental results have shown that WEDM in atmosphere offers a series of advantages such as better straightness accuracy and higher material removal rate. Figure 7 shows (HS-WEDM) in Gas. There are other important studies that work on dry WEDM, such as (Furudate C., and Kunieda, M.,(2001), Wang, T., et al. (2004), Wang, T., et al. (2008), Wang, T., et al. (2009), Wang, T., et al. (2012) and Lu, Y. et al. (2012))

Fig.7. Photo of dry HS-WEDM (Wang,T.,(2011))



2.5 Process Modelling and Multi Optimization

The modelling of the WEDM process by means of different approach like mathematical techniques has also been applied to effectively relate the large number of process variables to the different performance of the process.

2.5.1 Response surface methodology

Response surface methodology or RSM, is a collection of mathematical and statistical technique useful for the modelling and analysis of problems in which responses of interest is influence by several variables and the objective is to optimize these responses. These characteristic makes RSM useful approach for modelling and optimization of wire EDM. In this method if the response is well modelled by a linear function of the independent variables, then the approximating function is the First-order model

$$Y_U = b_0 + b_1X_1 + b_2X_2 + \dots + b_iX_i + e$$

(4)

If there is curvature in the system, then a polynomial of higher degree must be used, such as the second order model

$$Y_U = b_0 + \sum_{i=1}^K b_i X_i + \sum_{i=1}^K b_{ii} X_i^2$$


(5)

$$+ \sum_{j>i}^K b_{ij} X_i X_j + \dots + e$$

Where i is the linear coefficient, j is the quadratic coefficient, and β is the regression coefficient, k is the number of studied and optimized factors in the experiment, and e is the random error. Analysis of variance (ANOVA) has taken into account in order to estimate the suitability of the regression model (Montgomery, 2009, Noordin et al. (2004)). In this method the effects of the noise factors have been considered. In addition statistical optimization model can overcome the limitation of classical methods to obtain the optimum process conditions. Furthermore the interactions between processes variables are demonstrate. The main disadvantage of this method is the obtained optimum value can be a local optimum value as it shows in figure 7. In figure 7 the goal is minimization of the response. Furthermore this method is quite expensive because lots of experiment needs to be done. For instance if eight factor have considered two to power eight experiment needs to be done in full factorial design(=256) , even if we use half factorial design the number of experiments become 128 which is still high.

Lots of authors tried to model this process using the Taguchi method and response surface methodology approach. Like Hewidy, M.S. et al. (2005), Puri, A.B., Bhattacharyya, B., (2005), Kung, K.Y. and Chiang, K.T. (2008) , Sarkar, S., et al. (2008). Ghodsiyeh et al.(2012a,b,c and d), Kumar,A., et al. (2012) and Datta, S., Mahapatra S. S., (2010) which utilized response surface methodology coupled with grey-Taguchi technique.

Fig. 8. Response surface methodology optimization

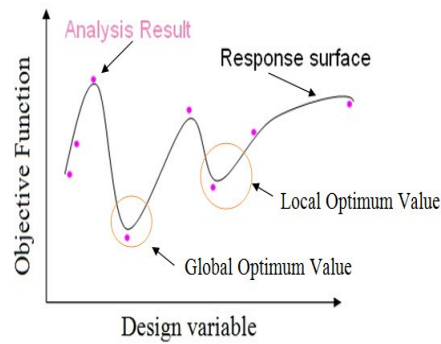

2.5.2 Orthogonal array (OA)

This Taguchi method is very useful for modelling and understanding the WEDM process. This Taguchi method allows for the analysis of many different parameters without carry out high amount of experimentation. This characteristic makes OA useful approach for modelling of wire EDM due to large number of parameters in this process. The main disadvantage of this method is that the results obtained are only relative and do not exactly indicate what parameter has the highest effect on the performance characteristic value. Also, since orthogonal arrays do not test all variable combinations, cannot indicate the significance of different factor interaction which is quit important in WEDM. Lots of authors tried to model this process using this method. Like Anand, K. N., (1996), Huang, J.T *et al.*(1999), Puri, A.B., Bhattacharyya, B., (2003), Kuriakose, S. and Shunmugam, M.S.,(2004), Tosun, N. *et al.*(2004), Wang,C.C., *et al.* (2009), Vamsi K. P. *et al.*(2010), Parashar, *et al.*(2010), Rao, P.S., *et al.* (2011), Kuruvila, N. and Ravindra, H. V. (2011), Satishkumar, D. *et al.*(2011).

2.5.3 Non-Traditional Optimization Algorithms

From early 1960s, various mathematical techniques were developed copying different phenomena of the nature. The attitude of the engineers is that they can learn and know from the nature. Engineers follow natural rules, such as in artificial neural network, the study of neurons is involved, and in genetic algorithm, the laws of genetics are transformed to be used as an optimization tool. These algorithms are very useful for optimization of the process which involves lots of parameters like WEDM. Sometimes result suggested by these algorithms cannot be achieved in reality; due to absence of the optimal parameter combination in the machine this could be the main disadvantage of this method. (Mahapatra and Patnaik (2006a)). The rationale behind the use of these algorithms is the capability of these algorithms to find the global optimal parameters

whereas the traditional optimization techniques normally tend to be trapped at local optima.(Mahapatra, S.S., Amar Patnaik, (2006c)). Some authors tried to optimize WEDM by this method like, Kuriakose, S., Shunmugam,(2005), Jeyapaul, R. *et al.* (2006), Mahapatra and Patnaik (2006c), Debabrata *et al.*(2007),Kuruvila, N. and Ravindra, H. V. (2011).

Mukherjee, R. (2012), compared the performance of different optimization algorithms on optimizing WEDM process. In this article six non-traditional optimization algorithms have compared, including; genetic algorithm, particle swarm optimization, sheep flock algorithm, ant colony optimization, artificial bee colony and biogeography-based optimization for single and multi-objective optimization of WEDM process. It was found that although all these six algorithms have high potential in achieving the optimal parameter settings, but the biogeography-based algorithm outperforms the others with respect to optimization performance, quick convergence and dispersion of the optimal solutions from their mean.

There are some researches that used traditional approach for modelling WEDM like Tarng, Y.S., (1995) which utilized feed forward neural network to model and simulated annealing (SA) algorithm is then applied to the neural network for solving the optimal cutting parameters problem. Other one is Lin, J.L. *et al.* (2000) which used Taguchi method with fuzzy logic for modelling and optimization. In addition, Huang, J. T. and Liao Y. S (2003) studied Wire-EDM based on Grey relational and statistical analyses. Furthermore Kuriakose *et al.* (2003) used data mining approach and C4.5 algorithm to model this process. Moreover Yuan *et al.* (2009) used Incorporating prior model into Gaussian processes regression for WEDM process modelling. Also Çaydas, U., *et al.* (2009) used neuro-fuzzy inference system (ANFIS) to model this process. Besides Chen, H.C. (2007) utilized a neural network integrated simulated annealing approach for optimizing WEDM.

3. Concluding remarks

(WEDM) is an advanced thermal machining process capable of accurately machining parts with complicated shapes, especially for the parts that are very difficult to be machined by traditional machining processes. It has been commonly applied for the machining and micro-machining of parts with intricate shapes and varying hardness requiring high profile accuracy and tight dimensional tolerances. Optimisation

of the WEDM process parameters is essential because WEDM is an expensive and widely used process. The ultimate goal of the WEDM process is to achieve an accurate and efficient machining operation. Several researchers have studied methods to improve the surface quality and increase the material removal rate of the WEDM process. However, the problem of selecting the cutting parameters in the WEDM process is not fully solved, even though the most up-to-date CNC-WEDM machines are presently available. Still there is lack of information about different WEDM wire types. Hence more research should be done about comparing different wiretypes on different responses. Furthermore there is not enough information about WEDM inaccuracies. More research can improve accuracy during WEDM machining specially in contour cutting. In addition it seems that still there is lack of information about dry and near dry-WEDM. Moreover using optimization algorithms can develop the optimization process significantly while just genetic algorithm widely use for optimization of this process up to now and using other algorithm might enhance optimization. The WEDM process has to be constantly improved to maintain as a competitive and economical machining operation in the modern tool room manufacturing industries. Finally it seems that more researches can enhance the capabilities of WEDM process significantly to improve the machining productivity, accuracy and efficiency.

4. References

1. Abdulkareem, S., Ali Khan, A., Zain, Z. M. (2011) "Experimental Investigation of Machining Parameters on Surface Roughness in Dry and Wet Wire-Electrical Discharge Machining" *Advanced Materials Research Vols. 264-265* pp. 831-836.
2. Anand, K. N., (1996): "Development of process technology in wire-cut operation for improving machining quality", *Total Quality Management*, Vol.7:1, pp. 11-28.
3. Antar, M.T., Soo S.L., Aspinwall, D.K., Jones, D., Perez, R.(2011) "Productivity and workpiece surface integrity when WEDM aerospace alloys using coated wires" *Procedia Engineering* Vol.19, pp.3 – 8
4. Aspinwall, D.K., Soo, S.L., Berrisford, A.E, Walder, G.(2008). Workpiece surface roughness and integrity after WEDM of Ti-6Al-4V and Inconel 718 using minimum damage generator technology, *CIRP Annals – Manufacturing Technology* Vol.57:pp. 187–190.
5. Bamberg, E., Rakwal, D., (2008) "Experimental investigation of wire electrical discharge machining of gallium-doped germanium" *Journal of Materials Processing Technology*. Vol. 197, pp. 419–427.
6. Benedict, G.F., (1987) *Electrical discharge machining (EDM), Non-Traditional Manufacturing Processes*, Marcel Dekker, Inc, New York & Basel, pp. 231–232.
7. Boopathi, S.(2012) "Experimental Comparative Study of Near-Dry Wire-Cut Electrical Discharge Machining (WEDM)" *European Journal of Scientific Research*, Vol.75, No.4, pp. 472-481
8. Çaydas, U., Hasçalık, A., Ekici, S., (2009) "An adaptive neuro-fuzzy inference system (ANFIS) model for wire-EDM", *Expert Systems with Applications* Vol.36:pp.6135–6139.
9. Chen, H.C., Lin, J.C., Yang, Y.K., Tsai, C.H., (2007) "Optimization of wire electrical discharge machining for pure tungsten using a neural network integrated simulated annealing approach" *Expert Systems with Applications*, Vol. 37 pp.7147–7153.
10. CunShan X., (2012) "Working Principle and Performance of Wire Electrical Discharge Machining" *Advanced Materials Research* Vol. 507 pp. 180-183.
11. Datta, S., Mahapatra S. S., (2010). "Modeling, simulation and parametric optimization of Wire-EDM process using response surface methodology coupled with grey-Taguchi technique" *International Journal of Engineering Science and Technology*. Vol.2, pp. 162-183.
12. Dauw, D.F., Albert, L., (1992). "About the evolution of wire tool performance in wire EDM". *Annals CIRP*. Vol.41 (1), pp. 221-225.
13. Debabrata, M., Pal, S.K. and Partha, S., (2007). "Modeling of electrical discharge machining process using back propagation neural network and multi-objective optimization using non-dominating sorting genetic algorithm-II". *Journal of Materials Processing Technology*, Vol.186 (1-30), pp.154-162.
14. Furudate C., and Kunieda, M., (2001), "Fundamental study on dry-WEDM" *Journal of the Japan Society for Precision Engineering*. Vol. 67, Issue 7, pp. 1180-1184.

15. Ghodsiyeh,D.a, Golshan,A. Hosseinienezhad,N., Hashemzadeh,M., and Ghodsiyeh,S.,(2012) “Optimiz- ing Finishing process in WEDMing of Titanium Alloy (Ti6Al4V) by Zinc Coated Brass Wire based on Response Surface Methodology” Indian Journal of Science and Technology,Vol.5, Issue 10,pp.:3365-3377.
16. Ghodsiyeh D.b, Lahiji MA, Ghanbari M, Shirdar MR and Golshan A (2012) “Optimizing Material Removal Rate (MRR) in WEDMing Titanium alloy (Ti6Al4V) using the Taguchi method”. Research Journal of Applied Sciences, Engineering and Technology, Vol. 4(17), pp.3154-3161.
17. Ghodsiyeh D.c, Lahiji MA, Ghanbari M, Shirdar MR and Shirdar,M.R. (2012) “Optimizing Rough Cut in WED- Ming Titanium Alloy (Ti6Al4V) by Brass Wire Using the Taguchi Method” Journal of Basic and Applied Scientific Research Vol. 2(8) pp.7488-7496.
18. Ghodsiyeh D., Davoudinejad, A., Hashemzadeh, M., Hosseinienezhad, N., and Golshan A (2013) “Optimizing Finishing Process in WEDMing of Titanium Alloy (Ti6Al4V) by Brass Wire based on Response Surface Methodology” Re- search Journal of Applied Sciences, Engineering and Tech nology
19. Choi, K.K., Nam, W.J., Lee Y.S. (2008) “Effects of heat treatment on the surface of a die steel STD11 machined by W-EDM” journal of materials processing technology ,Vol. 201,pp. 580–584.
20. Han, F., Zhang, J., Soichiro, I. (2007) “Corner error simula- tion of rough cutting in wire EDM” Precision Engineering Vol. 31, pp. 331–336
21. Han,F., Jiang, J., Yu, D., (2007a) “Influence of machining parameters on surface roughness in finish cut of WEDM”The International Journal of Advanced Manufacturing Technol- ogy. Vol. 34, Issue 5-6, pp 538-546.
22. Han,F., Jiang, J., Yu, D., (2007b) “Influence of discharge current on machined surfaces by thermo-analysis in finish cut of WEDM” International Journal of Machine Tools and Manufacture Vol. 47, Issues 7–8, pp.1187–1196.
23. Hasçalýk, A., Çaydas, U., (2004) “Experimental study of wire electrical discharge machining of AISI D5 tool steel” Journal of Materials Processing Technology Vol.148 pp.362–367.
24. Hassan, M. A., Mehat, N. S. , Sharif, S. , Daud, R. , Tomadi, S. H. , Reza, M. S.(2009) “Study of the Surface Integrity of AISI 4140 Steel in Wire Electrical Discharge Machining” Proceedings of the International MultiConference of Engi- neers and Computer ScientistsVol. II, pp.1-6.
25. Hewidy, M.S., El-Taweel T.A., El-Safty M.F.(2005) “Mod- elling the machining parameters of wire electrical discharge machining of Inconel 601 using RSM” , Journal of Materials Processing Technology. Vol. 169, pp. :328–336.
26. Ho, K.H., Newman, S.T. , Rahimifard, S. , Allen, R.D., (2004) “State of the art in wire electrical discharge machin- ing (WEDM)” International Journal of Machine Tools & Manufacture Vol.44,pp.1247–1259.
27. Hsue,W.J., Liao, Y.S. , Lu, S.S. (1999)“Fundamental ge- ometry analysis of wire electrical discharge machining in corner cutting”. International Journal of Machine Tools & Manufacture Vol.39 , pp.651–667
28. Huang, J.T., Liao, Y.S. and Hsue, W.J., (1999). “Determi- nation of finish-cutting operation number and machining parameters setting in wire electrical discharge machining”. Journal of Materials Processing Technology,Vol. 87, pp.69–81.
29. Huang J. T. and Liao Y. S.,(2003) “Optimization of machin- ing parameters of Wire-EDM based on Grey relational and statistical analyses” International Journal of Production Re- search, Vol. 41, no. 8,pp. 1707–1720.
30. Jain, V.K., (2005).Advanced Machining Processes, Allied Publishers Pvt. Limited, New 646 Delhi.
31. Jameson, E.C. , Description and development of electrical discharge machining (EDM), Electrical Discharge Machin- ing, Society of Manufacturing Engineers, Dearbern, Michi- gan, 2001, pp. 16
32. Jeyapaul, R., Shahabudeen, P., Krishnaiah, K., (2006) “Si- multaneous optimization of multi- response problems in the Taguchi method using genetic algorithm” The International Journal of Advanced Manufacturing Technology, Vol.3, pp.870–878.
33. Kanlayasiri , K. , Boonmung , S. ,(2007). “Effects of wire- EDM machining variables on surface roughness of newly developed DC 53 die steel: Design of experiments and re- gression

- model". *Journal of Materials Processing Technology*. Vol.192–193, pp: 459–464.
34. Kanlayasiri, K., Boonmung, S., (2007b). "An investigation on effects of wire-EDM machining parameters on surface roughness of newly developed DC53 die steel". *Journal of Materials Processing Technology*. Vol.187-188, pp. 26-29.
 35. Kapoor, J., Singh, S., Khamba, J. S., (2010) "Recent Developments in Wire Electrodes for High Performance WEDM" *Proceedings of the World Congress on Engineering 2010*, Vol. II, pp. 1-4.
 36. Klocke, F., Lung, D., Thomaidis, D., Antonoglou G., (2004) "Using ultra thin electrodes to produce micro-parts with wire-EDM" *Journal of Materials Processing Technology* Vol.149, pp. 579–584.
 37. Konda, R., Rajurkar, K.P., Bishu, R.R., Guha, A., Parson, M. (1999) "Design of experiments to study and optimize process performance" *International Journal of Quality & Reliability Management*, Vol.16 (1) pp.56–71.
 38. Kozak, J., Rajurkar, K. P., Wang, S. Z. (1994) "Material removal in WEDM of PCD blanks" *Journal of Engineering for Industry*. Vol. 116, No. 3, pp. 363-369.
 39. Kozak, J., Rajurkar, K.P., Chandarana, N., (2004) "Machining of low electrical conductive materials by wire electrical discharge machining (WEDM)" *Journal of Materials Processing Technology*, Vol.149, pp. 266–271.
 40. Kruth, J. P., Lauwers, B., Schachta, B., Humbeeck, J.V., (2004) "Composite Wires with High Tensile Core for Wire EDM" Vol. 53, Issue 1, pp. 171–174
 41. Kuang-Yuan Kung & Ko-Ta Chiang (2008) "Modeling and Analysis of Machinability Evaluation in the Wire Electrical Discharge Machining (WEDM) Process of Aluminum Oxide-Based Ceramic", *Materials and Manufacturing Processes*, Vol. 23:3, pp. 241-250.
 42. Kumar A., Kumar V., and Kumar J. (2012) "Prediction of surface roughness in wire electric discharge machining (WEDM) process based on response surface methodology" *International Journal of Engineering and Technology (IJET)* Vol. 2 No. 4, pp.708-719.
 43. Kung, K.Y.; Chiang K.T.(2008) "Modeling and analysis of machinability evaluation in the wire electrical discharge Vol. 23 (3–4), pp.241–250.
 44. Kuruvila, N., Ravindra H. V. (2011): "Parametric Influence and Optimization of Wire EDM of Hot Die Steel", *Machining Science and Technology: An International Journal*, Vol.15:1, pp. 47-75.
 45. Kuriakose, S., Mohan, K., Shunmugam, M.S., (2003) "Data mining applied to wire-EDM process" *Journal of Materials Processing Technology* Vol.142, pp. 182–189
 46. Kuriakose, S., Shunmugam, M.S., (2004) "Characteristics of wire-electro discharge machined Ti6Al4V surface", *Materials Letters* Vol.58: pp.2231–2237.
 47. Kuriakose, S., Shunmugam, M.S., (2005), "Multi-objective optimization of wire electro discharge machining process by Non-Dominated Sorting Genetic Algorithm", *Journal of Materials Processing Technology*, Vol.170, pp.133–141.
 48. Liao Y.S., Huang, J.T., Chen Y.H., (2004) "A study to achieve a fine surface finish in Wire-EDM" *Journal of Materials Processing Technology*. Vol.149, pp. 165–171
 49. Lin, J.L., Wang, K.S., Yan, B.H., Tarng, Y.S., (2000) "Optimization of the electrical discharge machining process based on the Taguchi method with fuzzy logics" *Journal of Materials Processing Technology*, Vol.102, pp.48-55.
 50. Lopez J.G., Verleysen P., and Degrieck, J., (2012), "Effect of fatigue damage on static and dynamic tensile behaviour of electro-discharge machined Ti-6Al-4V", *Journal of fatigue and fracture and engineering materials and structures*, Vol.35, No.12 . pp.1120-1132
 51. Lu, Y., Wang, T., Wang, C. and Wang C. (2012) "Empirical Modeling of High-speed WEDM Finishing in Gas" *Advanced Materials Research* Vol. 486 , pp 503-508
 52. Mahapatra, S.S., Amar Patnaik, (2006a), "Optimization of wire electrical discharge machining (WEDM) process parameters using Taguchi method", *The International Journal of Advanced Manufacturing Technology*, Vol. 34, No.9-10 , pp. 911-925.
 53. Mahapatra, S.S., Amar Patnaik, (2006b). "Parametric Optimization of Wire Electrical Discharge Machining (WEDM) Process using Taguchi Method". *Journal of the Brazilian*

- Society of Mechanical Sciences and Engineering. Vol. XX- VIII, No. 4, pp. 422-429.
54. Mahapatra, S.S., Amar Patnaik, (2006c). "Optimization of Wire Electrical Discharge Machining (WEDM) process parameters using genetic algorithm" Indian Journal of engineering and material sciences. Vol.13, pp.494-502
 55. Montgomery, D.C., (2009), Design and Analysis of Experiments, 7th Edition, John Wiley & Sons (Asia) Pte Ltd, pp.207-264.
 56. Mukherjee, R., Chakraborty, S., Samanta, S., (2012) "Selection of wire electrical discharge machining process parameters using non-traditional optimization algorithms" Applied Soft Computing Vol. 12, Issue 8, pp. 2506–2516.
 57. Newton, T. R., Melkote, S. N., Watkins, T. R., Trejo, R. M., Reister, L. (2009) "Investigation of the effect of process parameters on the formation and characteristics of recast layer in wire-EDM of Inconel 718" Materials Science and Engineering, Vol. 513–514 pp.208–215.
 58. Nishikawa, M. and Kunieda, M., (2009) "Prediction of wire-EDMed surface shape by in-process measurement of wire electrode behavior" Journal of the Japan Society for Precision Engineering. Vol. 75, Issue 9, pp. 1078-1082
 59. Noordin, M. Y., Venkatesh, V. C., Sharif, S., Elting, S. and Abdullah, A., 2004. "Application of response surface methodology in describing the performance of coated carbide tools when turning AISI 1045 steel". Journal of Materials Processing Technology. Vol.145, pp. 46-58.
 60. Parashar V., A. Rehman, J.L. Bhagoria, Y.M. Puri, (2010), "Kerfs width analysis for wire cut electro discharge machining of SS 304L using design of experiments", Indian Journal of Science and Technology, Vol. 3 No. 4. pp.369-373.
 61. Parashar V., A. Rehman, J.L. Bhagoria, (2012) "Performance Measurement and Data Analysis of Material Removal Rate for Wire Cut Electro Discharge Machining Process" Applied Mechanics and Materials Vols. 110-116. Pp. 1683-1690
 62. Prohaszka, J., Mamalis, A.G., Vaxevanidis N.M., 1997. "The effect of electrode material on machinability in wire electro-discharge machining", Journal of Materials Processing Technology. Vol 69, pp. 233-237.
 63. Po-Huai Yu, Hsiang-Kuo Lee, Yang-Xin Lin, Shi-Jie Qin, Bing-Hwa Yan & Fuang-Yuan Huang (2011) "Machining Characteristics of Polycrystalline Silicon by Wire Electrical Discharge Machining", Materials and Manufacturing Processes, Vol. 26:12, pp. 1443-1450.
 64. Poro's, D., Zaborski, S., (2009) "Semi-empirical model of efficiency of wire electrical discharge machining of hard-to-machine materials", Journal of Materials Processing Technology. Vol.209: pp.1247–1253.
 65. Puri, A.B. and Bhattacharyya, B., 2003, "An analysis and optimisation of the geometrical inaccuracy due to wire lag phenomenon in WEDM", International Journal of Machine Tools & Manufacture, Vol. 43, pp. 151–159.
 66. Puri, A.B. and Bhattacharyya, B., (2005), "Modeling and analysis of white layer depth in a wire-cut EDM process through response surface methodology", International Journal of Advanced Manufacturing Technology, Vol. 25:67. pp. 301–307.
 67. Rajurkar, K.P., Wang, W.M., (1993), "Thermal modeling and on-line monitoring of wire-EDM", Journal of Materials Processing Technology, Vol. 38, No. 1-2 : pp.417-430.
 68. Ramakrishnan, R., Karunamoorthy, L., (2006), "Multi response optimization of wire EDM operations using robust design of experiments", International Journal of Advanced Manufacturing Technology, Vol. 29, pp. 105-112.
 69. Rao, P., S., Ramji, K., Satyanarayana, B., (2011) "Effect of WEDM Conditions on Surface Roughness: A Parametric Optimisation Using Taguchi Method" International Journal of Advanced Engineering Sciences and Technologies Vol. 6, pp. 041 – 048.
 70. Roger Kern, 2007. EDM Today magazine, January/ February Issue.
 71. Electronic references, www.edmtodaymagazine.com.
 72. Roger Kern, 2008. EDM Today magazine, March/April Issue.
 73. Electronic references, www.edmtodaymagazine.com.
 74. Sarkar, S., Sekh, M., Mitra, S., Bhattacharyya, B., (2008) "Modeling and optimization of wire electrical discharge machining of γ -TiAl in trim

- cutting operation”, *Journal of Materials Processing Technology*, Vol. 205; pp.376–387.
75. Sarkar, S, S. Mitra, B. Bhattacharyya, (2005) “Parametric analysis and optimization of wire electrical discharge machining of γ -titanium aluminide alloy”, *Journal of Materials Processing Technology*, Vol. 159: pp.286–294.
 76. Satishkumar, D., Kanthababu, M. Vajjiravelu, V. ,Anburaj, R. , Thirumalai Sundarajan, N. , Arul, H., (2011) “Investigation of wire electrical discharge machining characteristics of Al6063/SiCp composites”*The International Journal of Advanced Manufacturing Technology* .Vol.56: pp.975–986.
 77. Scott, D, S. Boyina, K.P. Rajurkar, (1991) “Analysis and optimisation of parameter combination in wire electrical discharge machining”*International Journal of Production Research*. Vol.29 (11) pp. 2189–2207.
 78. Shah, A., Mufti, A.N., Rakwal,D., Bamberg, E.,(2011) “Material Removal Rate, Kerf, and Surface Roughness of Tungsten Carbide Machined with Wire Electrical Discharge Machining” *Journal of Materials Engineering and Performance*, Vol. 20, pp. 71-76
 79. Singh, H., Garg, R.(2009) “Effects of process parameters on material removal rate in WEDM” , *Journal of Achievements in Materials and Manufacturing Engineering* Vol. 32:pp. 70-74.
 80. Sinha, S. K., (2010) “Effects of Wire Lag in Wire Electrical Discharge Machining” *International Journal of Engineering Science and Technology* Vol. 2(11), pp. 6622-6625.
 81. Spedding, T.A. and Wang, Z.Q. (1997a), “Study on modeling of wire EDM process” *Journal of Materials Processing Technology*, Vol. 69, Issue 1-3, pp. 18-28.
 82. Spedding, T.A. and Wang, Z.Q. (1997b), “Parametric optimization and surface characterization of wire electrical discharge machining process” *Precision Engineering*. Vol. 20, Issue 1, pp. 5-15
 83. Swain, A.K., Ray,S., Mandal,N.K.,(2012) “Study on Kerf Width in Wire-EDM based on Taguchi Method” *Applied Mechanics and Materials* Vol. 110-116 , pp 1808-1816.
 84. Tarng, Y.S., Ma, S.C. and Chung, L.K. (1995). “Determination of optimal cutting parameters in wire electrical discharge machining”. *International Journal of Machine Tools and Manufacture*. Vol. 35, No 12, pp.1693–170.
 85. Tosun, N., Cogun, C., 2003, “An investigation on wire wear in WEDM”, *Journal of Materials Processing Technology*, Vol. 134, No. 3, pp. 273-278.
 86. Tosun, N., Cogun, C., & Inan, A., (2003), “The Effect of Cutting Parameters on Workpiece Surface Roughness in Wire EDM”, *Machining Science and Technology: An International Journal*, Vol. 7, No. 2, pp. 209-219.
 87. Tosun, N. , Cogun, C. , and Pihtili, H., (2003) “The Effect of Cutting Parameters on Wire Crater Sizes in Wire EDM” *The International Journal of Advanced Manufacturing Technology*. Vol. 21,pp.857–865
 88. Tosun ,N., Cogunb,C., Tosun,G. ,(2004). “A study on kerf and material removal rate in wire electrical discharge machining based on Taguchi method”, *Journal of Materials Processing Technology* Vol.152. pp: 316–322
 89. Vamsi K. P. ,Surendra B. B, Madar V. P ,Swapna M. (2010) “Optimizing Surface Finish in WEDM Using the Taguchi Parameter Design Method” *Journal of the Brazilian Society of Mechanical Sciences and Engineering*. Vol. XXXII, No.2, pp. 107-113
 90. Wang,C.C., Chowm,H.M., Yang, L.D., Te Lu C.(2009) “Recast layer removal after electrical discharge machining via Taguchi analysis: A feasibility study” *Journal of Materials Processing Technology* Vol. 209 pp.4134–4140.
 91. Wang,T. and Kunieda, M. (2004) “Dry WEDM for Finish Cut” *Key Engineering Materials* Vols. 259-260 .pp 562-566
 92. Wang, T., Zhang, X., Zhao, X., (2006) “Study on Finishing Cut with Dry WEDM” *Materials Science Forum* Vols. 532-533 .pp 273-276.
 93. Wang, T., Zhang, X., Zhao, X., (2008) “Study on Dry WEDMed Surface Quality of Mould Steel” *Key Engineering Materials* Vols. 375-376 . pp 416-420.
 94. Wang, T. , Lu , Y. M. , Xie , S. Q. , Hao, S. S. , and Zhao, H. (2008) “Dry WEDM in Improving LS-WEDMed Surface Quality” *Advanced Materials Research* Vols. 53-54. Pp. 387-392.
 95. Wang, T. and Zhang X.F., (2006) “Study on High-speed WEDM in Gas” *Key Engineering Materials* Vols. 315-316 . pp 136-139.

96. Wang, T., Lu, Y.M., Hao, S.S. , Xie, S.Q. , Xu, X.C. and Wang, Y. (2009) “Dry WEDM in Improving HS-WEDMed Surface Quality” Key Engineering Materials Vols. 392-394 pp 624-628
97. Wang, T., Qiu , F. , Wang , C.Q. , Zhang G.Z. and Xu, X.C., (2011) “Experimental Study on Dry WEDM Finishing” Key Engineering Materials Vol. 455 .pp 190-193.
98. Wang, T., Xie, S.Q. , Xu , X.C. , Chen , Q. , Lu, X.C. and Zhou S.H. (2012) “Application of Uniform Design in Ex- periments of WEDM in Gas” Advanced Materials Research Vol. 426 pp 11-14
99. Yan, M. T., Lai Y. P. (2007) “Surface quality improvement of wire-EDM using a fine-finish power supply” Inter- national Journal of Machine Tools & Manufacture Vol.47, pp.1686–1694.
100. Yan, M. T., and Huang, P. H. (2004), “Accuracy improve- ment of wire-EDM by real-time wire tension control” In- ternational Journal of Machine Tools & Manufacture Vol.44 pp. 807–814
101. Yuan,J., Liu ,C.L., Liu,X., Wang ,K., Yu,T., (2009) “In- corporating prior model into Gaussian processes regression for WEDM process modeling”Expert Systems with ApplicationsVol. 36, pp. 8084–8092.
102. Zhang, X.Y., Wang, D, Li, X.J. (2012) “Comparison study for finished accuracy of WEDM process” Advanced Materi- als Research Vols. 479-481. pp 476-480.